

SJ-HS

This Stainless Steel Weighing Pan is extremely practical for all kinds of hygienic applications



SJ-1000HS SJ-2000HS SJ-5000HS SJ-12KHS



AND
A&D WEIGHING

...Clearly a Better Value

Food service, Stores, Post offices, Industries, Factories, Schools, Laboratories, Warehouses, Offices, Home use and a wide range of other diverse weighing applications are possible.

■ **Stainless steel weighing pan**

■ **High resolution**

(SJ-5000HS:1/2500, SJ-12KHS:1/2400, SJ-1000HS/2000HS: 1/2000)

■ **Fast stability time – Less than 1 second**



■ **Large wide LCD display (25mm height)**

■ **Durable body**

■ **Large weighing pan 230mm x 190mm**



■ **Full digital calibration function**

■ **Multiple weighing units – g, lb, oz and lb-oz**



■ **Battery operation with 4 x D size dry batteries**

■ **Simple and easy to change the batteries**

■ **Optional AC adapter**



■ **Automatic power OFF function**

■ **Spirit level and adjustable feet for accurate weighing**

■ **Status indication function – Battery, Stable, Zero and Net**




SJ-HS Specifications

		SJ-1000HS	SJ-2000HS	SJ-5000HS	SJ-12KHS
Capacity x Resolution	g	1000g x 0.5g	2000g x 1g	5000g x 2g	12kg x 0.005kg
	lb	2.2lb x 0.001lb	4.4lb x 0.002lb	11lb x 0.005lb	26lb x 0.01lb
	oz	35oz x 0.02oz	70oz x 0.05oz	176oz x 0.1oz	423oz x 0.2oz
	lb-oz	2.2lb x 0.1 oz	4.4lb x 0.1 oz	11lb x 0.1oz	26lb x 1 oz
Linearity		±1g	±2g	±5g	±10g
Repeatability (S.D.)		1g	2g	5g	10g
Span drift		±0.015% / °C TYP (5°C~35°C/ 41°F~95°F)			
Display		Liquid Crystal Display , 25mm / 0.98 inches			
Operating temperature		-10°C~40°C / 14°F~104°F, less than 85% RH (No condensation)			
Display update		Approx. 10 times per second			
Power		4 x R20P / LR20 / "D" size batteries or AC adapter			
Battery life		Approx. 800 hours with alkaline cells at 20°C / 68°F			
Pan size		230 (W) x 190 (D) mm / 9.05 (W) x 7.48 (D) inches			
Dimensions		265 (W) x 250 (D) x 103 (H) mm / 10.4 (W) x 9.8 (D) x 4.1 (H) inches			
Weight		Approx. 2.1kg / 4.6lb			
Calibration mass		1000g	2000g	5000g	10kg

Specifications subject to change for improvement without notice

External Dimensions (mm / inches)

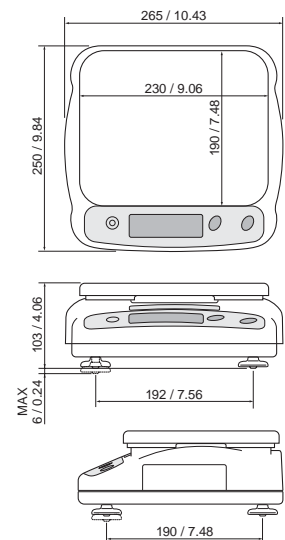

Accessories

AX-TB164B	AC adapter	AC230V "C" type plug
AX-TB173A	AC adapter	AC230V "BF" plug
AX-TB196	AC adapter	AC100 "A" type plug
AX-TB202	AC adapter	AC120 "A" type plug